



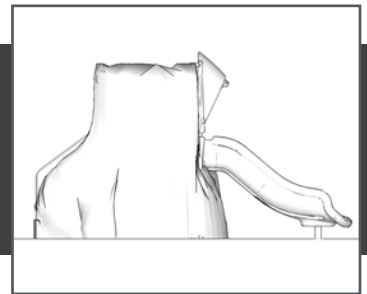

A stump and a slide. How can it be this simple and yet so much fun?! Young players reach the top of the stump and slide down a 30" slide. Tree is constructed of durable Glass Fiber Reinforced Concrete (GFRC).



Tree Stump Slide
1000224


L: 10'-6" x W: 4'-10" x H: 6'-2"
2,150 LBS

~ Dimensions and weights are approximate ~
~ Heights shown from top of surfacing ~
User Group Age: 2-5

All images and concepts are Copyright © 2016, Cre8Play, LLC-All rights reserved. Cre8Play may change or modify this information as necessary and without notice.

Revised 8/30/16

5121 Winnetka Ave N • Suite 108
New Hope, MN 55428
612.670.8195
info@cre8play.com
cre8play.com


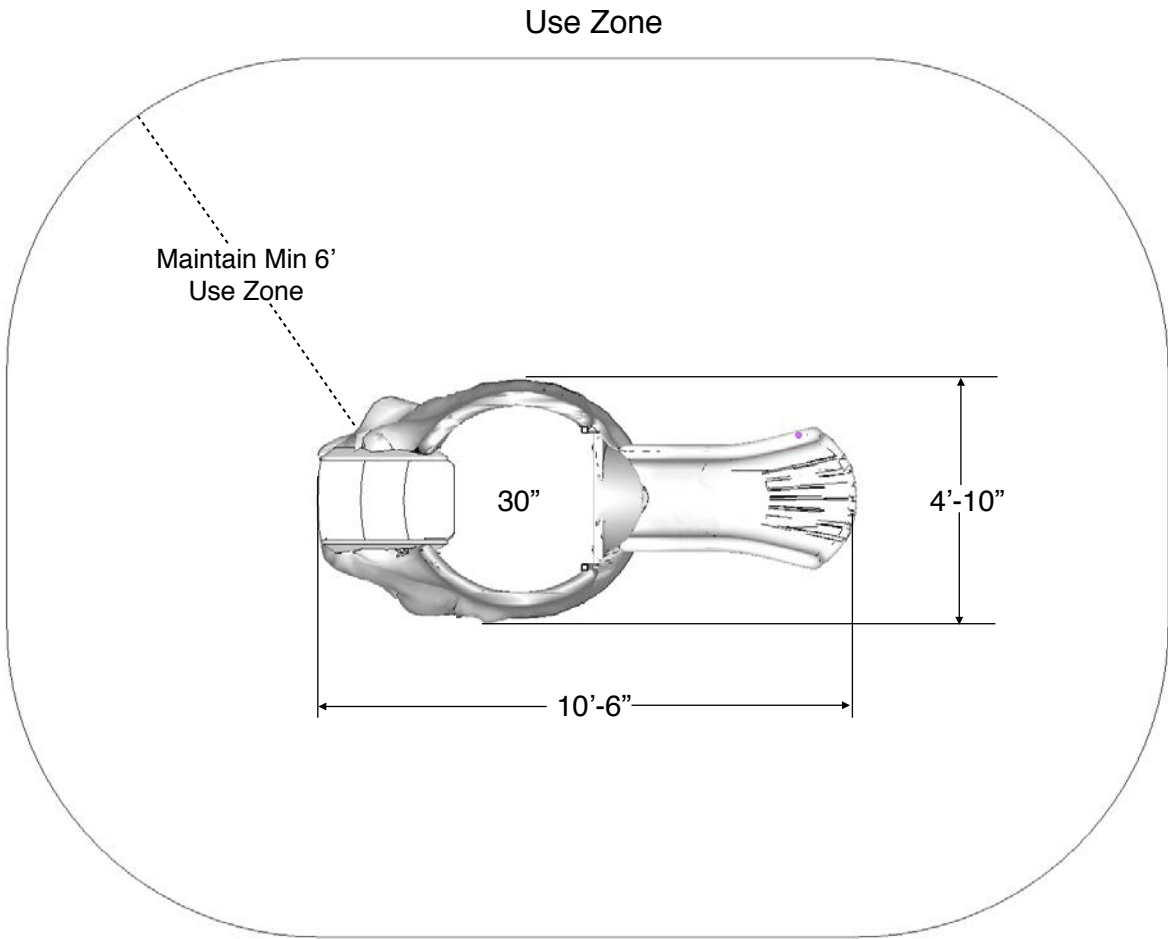


Product: 1000224

Included Items:



Item	Description	Quantity
Tree Stump Slide	Play Equipment	1
Anchor Bolt 1/2" x 3"	Mounting Hardware	4-In-ground, 6-Surface mount
Hardware Kit	Assembly Hardware	1

In-Ground

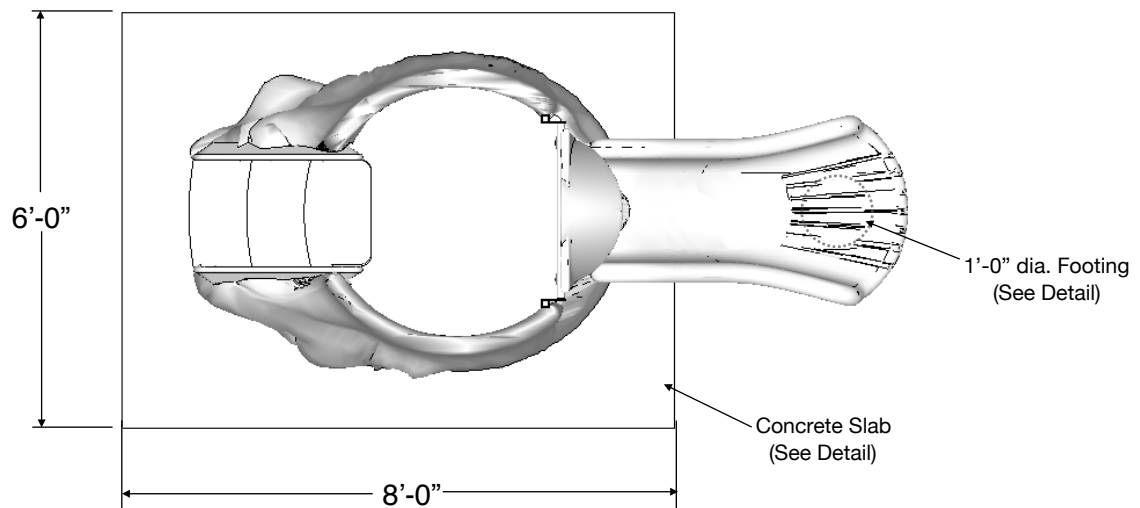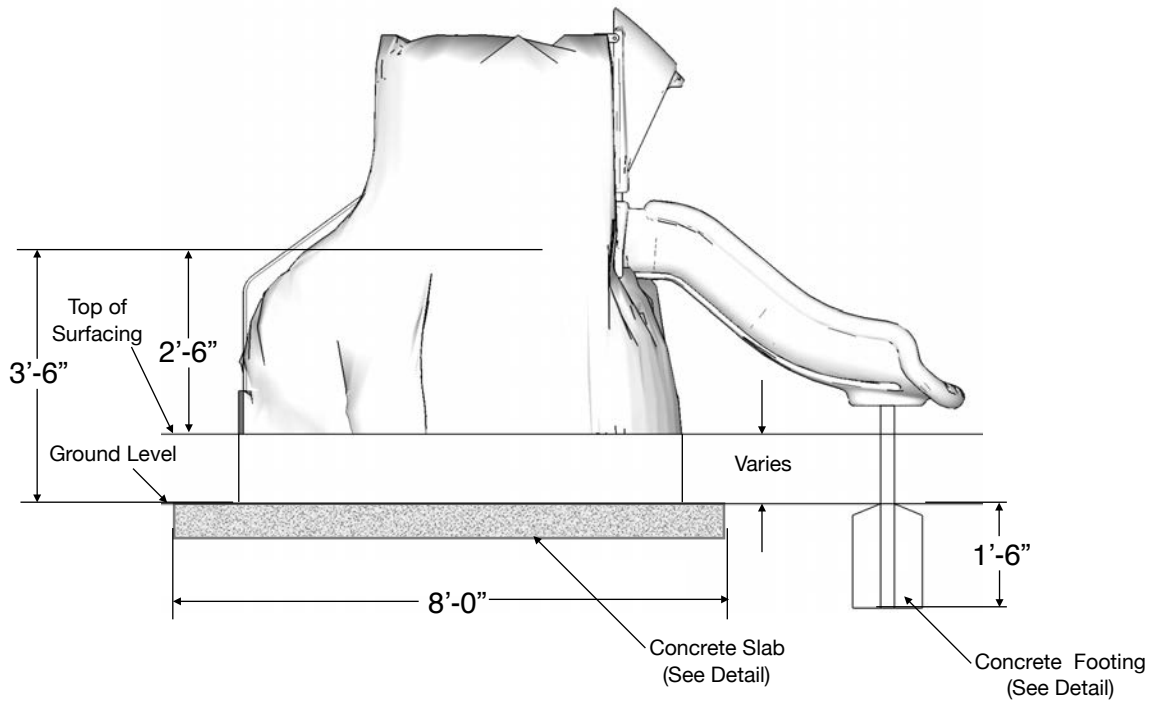

Product: 1000224 - In-Ground

Surface Mount

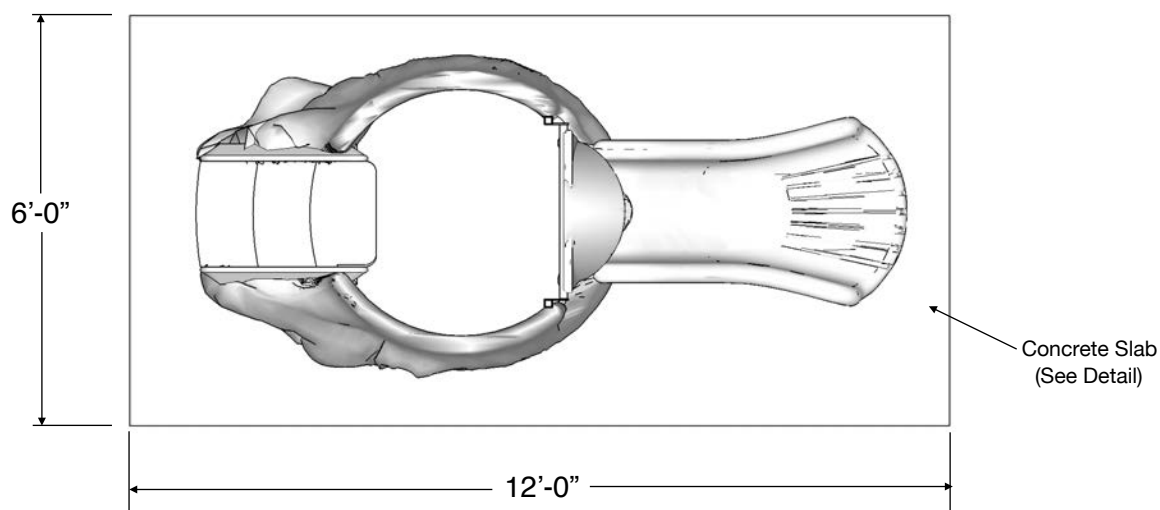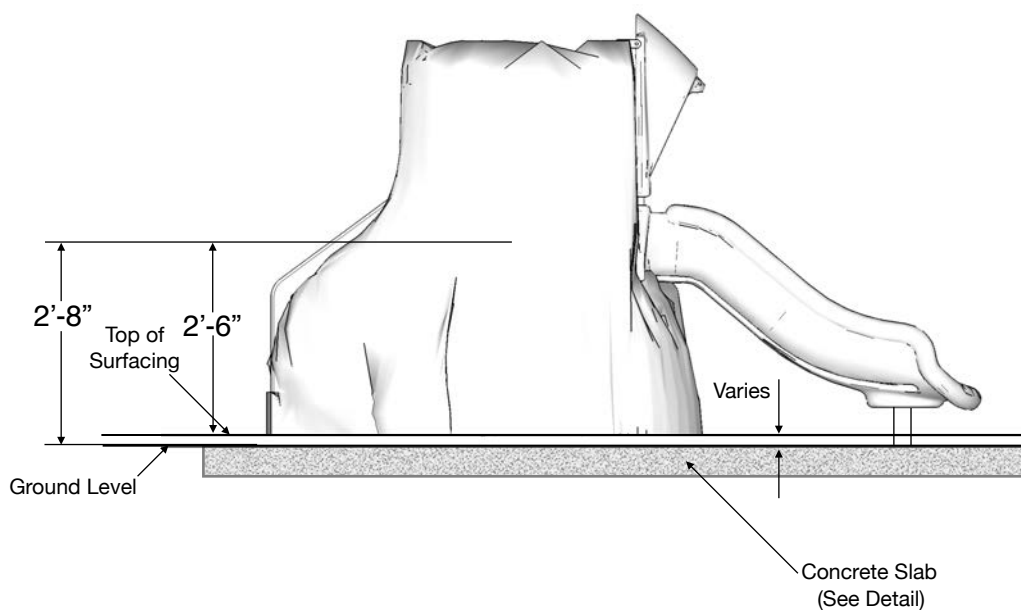

Product: 1000224 - Surface Mount


NOTE: Read installation instructions thoroughly before starting installation process.

Step 1: Lay out the area and prepare the site for install. Concrete must be installed over a solid, level base. Check local soil condition and codes. See installation instructions sheet for minimum use zone requirements to ensure proper spacing and adequate surfacing area.

Step 2: Pour a concrete base for the Tree Stump Slide unit. Refer to the typical slab section on the typical footing page. The concrete should be flush with the ground level. Allow time for the concrete to completely cure before continuing. For the in-ground installation, refer to the typical in-ground footing detail on excavating a hole for the the slide foot buck.

NOTES PRIOR TO CONSTRUCTION:

- Use appropriate equipment to lift and move the play equipment.
- Check local codes and requirements prior to digging or installing any equipment.

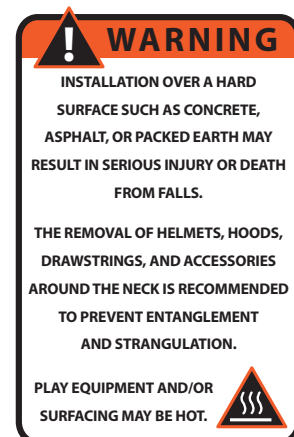


Assembly Instructions




STEP 3 - Locate and place the Tree Stump Slide unit in its final installation location.



STEP 4 - Bolt the slides foot buck to the slide following the manufacturer's instructions and hardware.

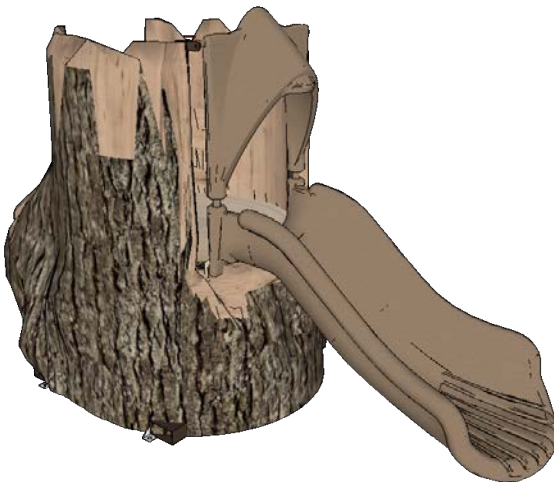

Step 5: Position the slide to the Tree Stump Slide unit.

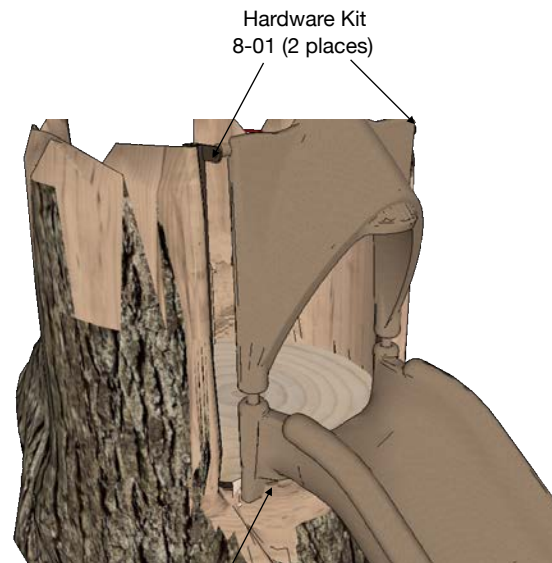

Hardware Kit
8-02 (4 places)

Step 6: Bolt the slide to the Tree Stump Slide unit using hardware kit 8-01 (2 places) and hardware kit 8-02 (4 places).

~ All dimensions are approximate ~

User Group Age: 2-5

Last Revised 8/30/16

Step 7: See the hardware recommendation page and locate your anchor bolts, supplied by Cre8Play. Using the proper standard drill bit size noted in the installation table, drill the concrete to the appropriate hole depth (C).


Step 8: Insert the anchor bolt into the hole and tighten until the bolt is fully seated. Do NOT over tighten the anchor bolts.

Step 9: Refer to the surfacing manufacturer for installation of an approved impact attenuating play surface with a minimum of 6 feet in every direction.


Installation Table

Anchor Bolt Size	ANSI Standard Drill Bit Diameter	Anchor Head (Socket Size) Diameter Ⓐ	Minimum Embedment Ⓑ	Hole Depth Ⓒ
1/2" x 3"	7/16"	3/4"	2 1/2"	3 1/2"


Anchor Bolt (Large Diameter Tapcon) Installation:

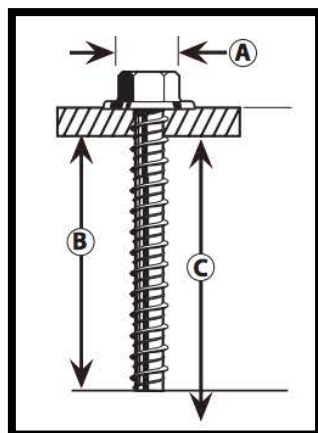

Step 1: Drill

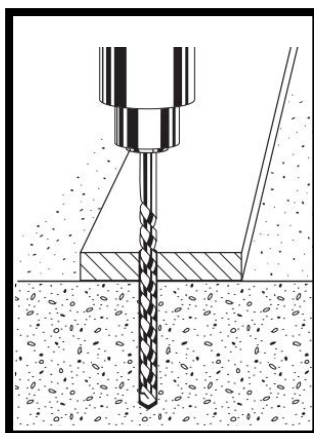

Step 2: Anchor

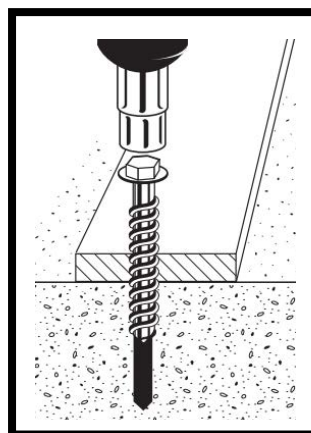

HARDWARE KIT 8-01


3/8" X 1 1/4" BUTTON HEAD, PIN-IN, SS BOLT
3/8" FLAT WASHER, SS
3/8" SPLIT LOCK WASHER, SS

X2
X2
X2


HARDWARE KIT 8-02

3/8" X 2 1/2" BUTTON HEAD, PIN-IN, SS BOLT
3/8" FLAT WASHER, SS
3/8" SPLIT LOCK WASHER, SS

X4
X4
X4

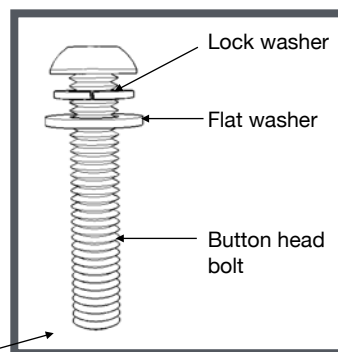

Button head bolt, lock washer and flat washer



Mounting Detail
(Not to Scale)

USE THREAD LOCKING COMPOUND ON ALL
THREADED FASTENERS

~ All dimensions are approximate ~

User Group Age: 2-5

Last Revised 8/30/16

